



**Features**

- 150 or 200 Watt Voice Evacuation Expander
- Microphone capable for voice communication
- Temporal whoop alarm tone
- Built-in power supply with battery charger
- 25 or 70 VRMS operation - field selectable with no additional parts required
- Power expansion of any Evax System



**Description**

The Evax 150E/200E Voice Evacuation System Expander Panels provide an easy and cost-effective way to increase the output power of an EVAX 150 or 200W voice evacuation system.

Voice evacuation panels can be supplied with or without a paging microphone, and include an audio amplifier, Temporal pattern alarm tone, power supply and battery charger.

Voice evacuation expanders can be ganged together in any combination to provide up to 2000 Watts of audio power.

The EVAX 150EM/200EM voice evacuation panel is the perfect way to provide a manually activated emergency paging panel for buildings. The Series comes complete with a 50/100 watt audio amplifiers, power supply and battery charger, and a paging microphone, all housed in a 14.5 x 18 x 4” cabinet.

The EVAX 150/200EM provides the same features with additional power in our double cabinet housing 2 amplifier modules, 14.5 x 27 x 4”.

**Technical Specifications**


Dimensions	150E/200E - 14.5”x 27”x 4” (W x H x D)
Color	Charcoal Gray, Red (optional)
<b>EVAX-50E</b>	
Power	24-30V AC/DC
Current	1.00A Alarm 0.13 Standby
Avg. Current Draw in Alarm	1.0 A, 3.2A peak
Output	50 Watts
<b>EVAX-100E</b>	
Power	24-30V AC/DC
Current	2.50A Alarm 0.18 Standby
Avg. Current Draw in Alarm	2.5 A, 6.4A peak
Output	100 Watts

### Description con't.


The EVAX 150E/200E Series is intended for use when a 150/200 Watt audio expander with its own complete enclosure is needed. The EVAX 150/200 provides the same expansion features as the 25E/50E/100E panels for greater power requirements in the larger cabinet configuration.

The EVX-25/50/100E voice evacuation module provides 25/50/100 watts of audio amplification, and an integral power regulator and battery charger.

### Wiring and Installation

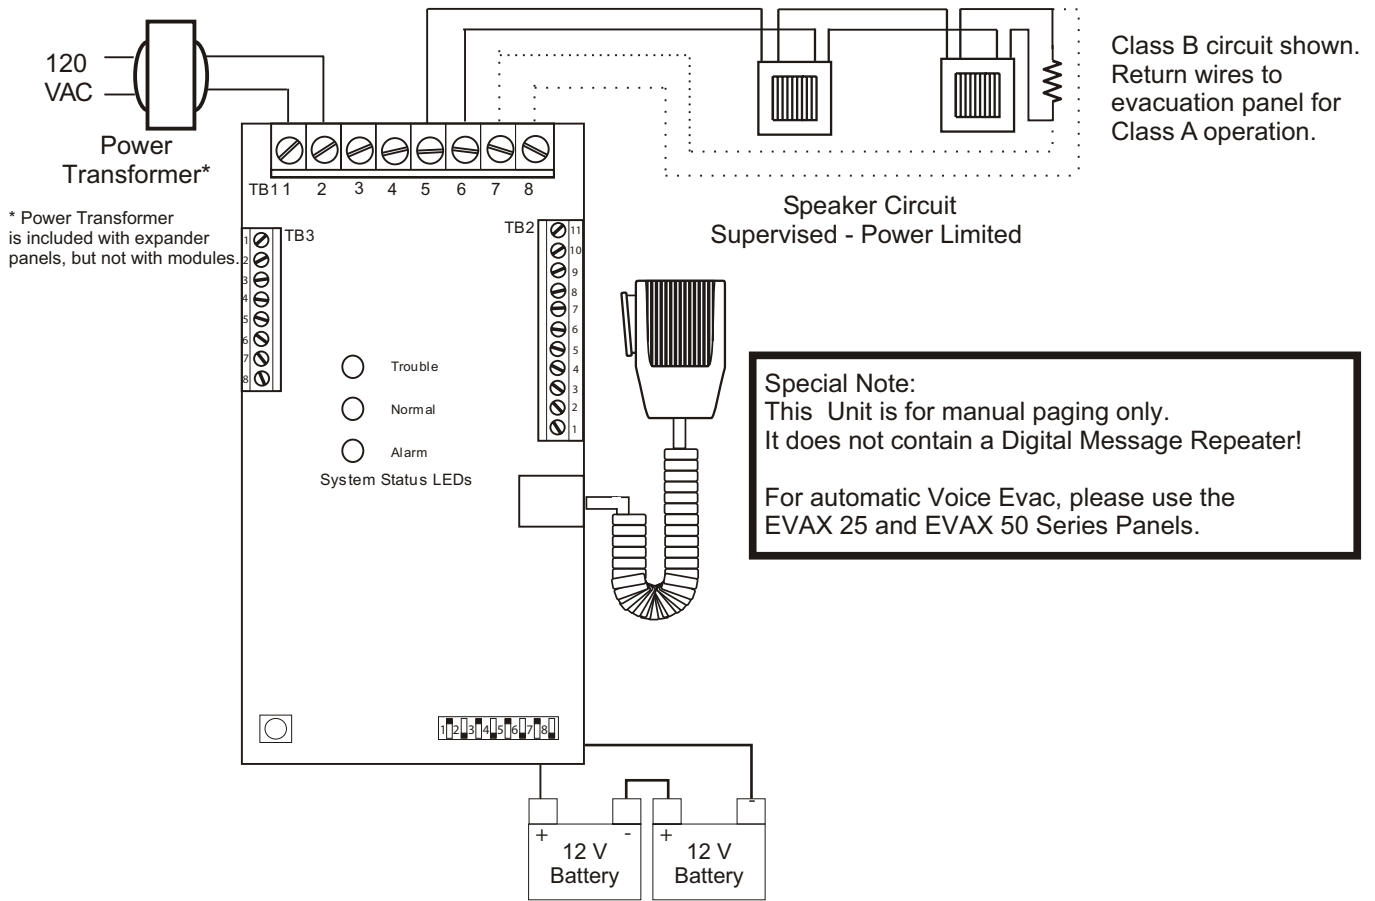

### Mounting Dimensions:

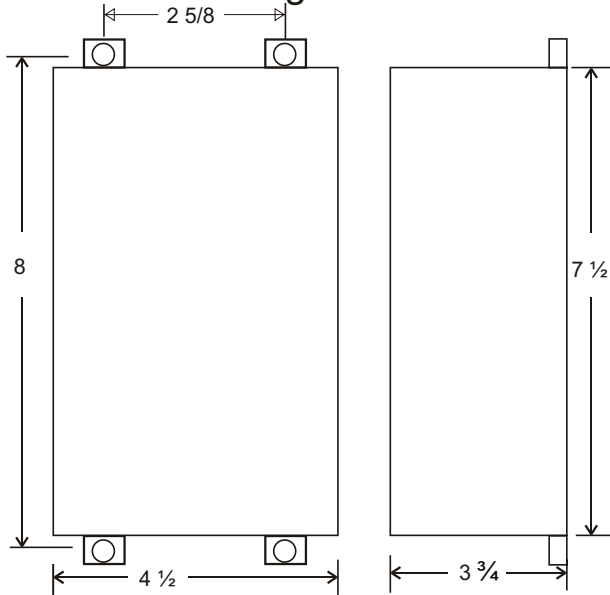

### Ordering Information

Description	Stock No.
150W Voice Evacuation Panel w/ mic	EVAX-150EM
150W Voice Expander Panel w/o mic	EVAX-150E
200W Voice Evacuation Panel w/ mic	EVAX-200EM
200W Voice Expander Panel w/o mic	EVAX-200E